
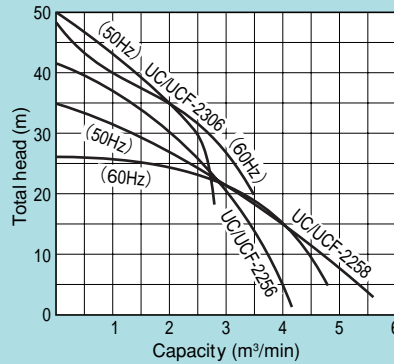
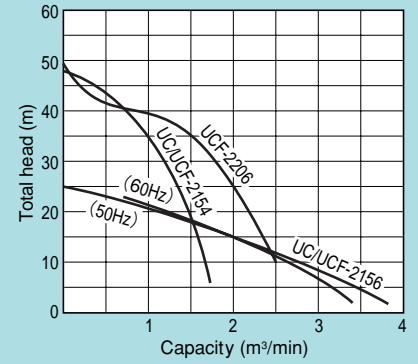
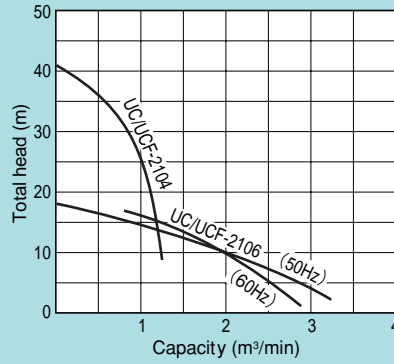
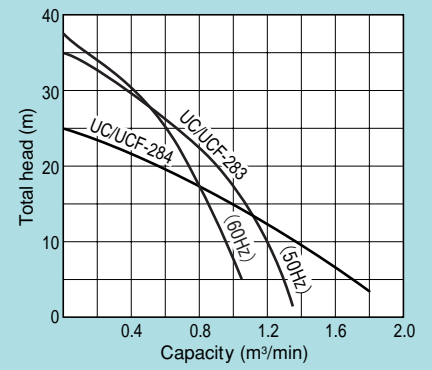


PERFORMANCE CURVES

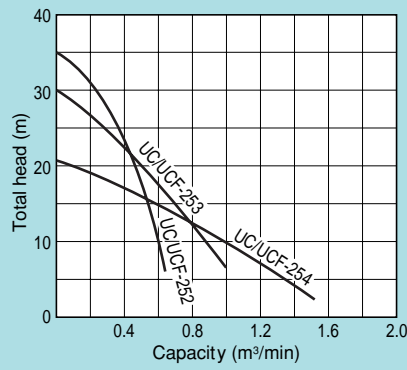

STANDARD SPECIFICATIONS

MODELS	DISCHARGE DIA		MOTOR OUTPUT		TOTAL HEAD	CAPACITY	CABLE LENGTH	WEIGHT WITHOUT CABLE
	mm	in	kW	HP	m	m³/min	m	kg
UC-252	50	2	3.7	5	30	0.2	10	51
UCF-252								89
UC-253	80	3	3.7	5	20	0.5	10	49
UCF-253								82
UC-254	100	4	3.7	5	10	1	10	49
UCF-254								84
UC-283	80	3	5.5	7.5	28	0.5	10	49
UCF-283								82
UC-284	100	4	5.5	7.5	15	1	10	49
UCF-284								84
UC-2104	100	4	7.5	10	27	1	10	82
UCF-2104								118
UC-2106	150	6	7.5	10	10	2	10	79
UCF-2106								113
UC-2154	100	4	11	15	35	1	10	87
UCF-2154								123
UC-2156	150	6	11	15	15	2	10	84
UCF-2156								118
UCF-2206	150	6	15	20	35(25)*	1.5(2)*	10	139
UC-2256	150	6	19	25	30	2	10	167
UCF-2256								231
UC-2258	200	8	19	25	15	4	10	157
UCF-2258								224
UC-2306	150	6	22	30	35	2	10	170
UCF-2306								231

*Figures in parentheses refer at 60Hz. • Specifications are subject to change without notice.