
S2770/3370RT

COMPACT ROUGH TERRAIN SCISSORS



- Compact diesel rough terrain scissor lifts
- Excellent rough terrain performance
- Easy to operate
- Roll-out deck extension for extra reach
- Ideal for outdoor work in confined spaces

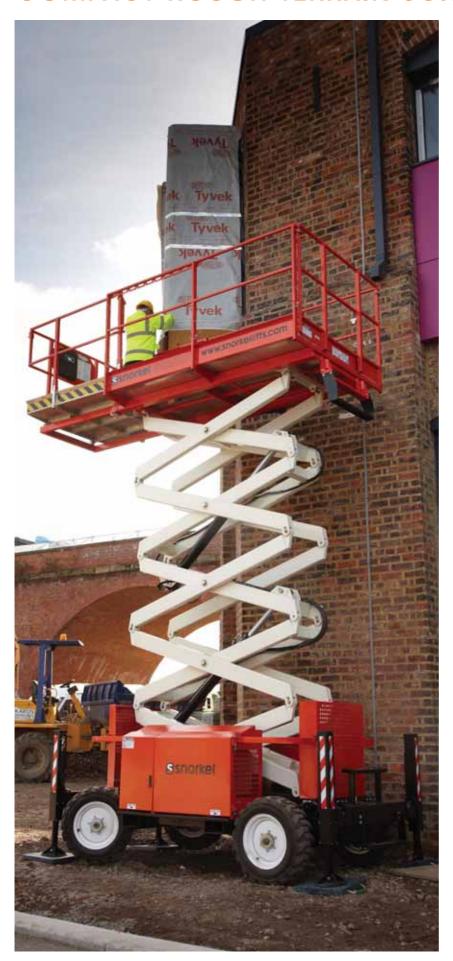

COMPACT RT SCISSORS


DIMENSIONS	\$2770RT	S3370RT
Max. working height	10.3m	12.1m
Max. platform height (A)	8.28m	10.1m
Platform size (stowed) (B)	2.74m x 1.65m	2.74m x 1.65m
Platform size (extended) (C)	4.0m x 1.65m	4.0m x 1.65m
Deck extension	1.2m	1.2m
Overall width (D)	1.77m	1.77m
Overall length (E)	3.36m	3.36m
Stowed height (F)	2.56m	2.70m
Min. height (guardrails folded)	1.75m	2.0m
Ground clearance	350mm	350mm

PERFORMANCE			
Platform capacity (SWL)	580kg	450kg	
Max. drive height	8.28m	10.1m	
Max. drive speed (stowed)	4.5km/h	4.5km/h	
Max. drive speed (elevated)	0.5km/h	0.35km/h	
Raise/lower time	26/30 sec	50/60 sec	
Gradeability	35%	35%	
Max. outrigger levelling, front to rear	6°	6°	
Max. outrigger levelling, side to side	10°	10°	
Inside turning radius	2.83m	2.83m	
Outside turning radius	4.60m	4.60m	
Tyres	27 x 10.5 - 15 poly filled loader lug		
Controls	proportional joystick		
Drive system	4 wheel drive 4 wheel drive		


POWER	
Power source	Kubota D-902 water cooled diesel 22.5h

WEIGHT		
Gross weight	2,930kg	3,620kg

TURNING RADIUS



S2770/3370RT



STANDARD FEATURES

- 1.2m deck extension
- 4 wheel drive
- 4 hydraulic outriggers with automatic levelling
- Proportional joystick control
- Poly filled lug tyres
- Oscilating/floating axle
- Power line to platform (no sockets)
- Horn
- Drive motion alarm
- Lower warning alarm
- Fold-down guardrails
- CE approved

OPTIONS

- Special paint colours
- Non marking tyres
- LPG power
- Hydraulic generator 240V/2kW
- Dual lanyard anchorage point
- Flashing amber beacon



36 Bruce Road, Levin, 5510, New Zealand t: +64 (0)6 368 9168

f: +64 (0)6 368 9164

e: sales.nz@snorkellifts.com