



TRAILER MOUNT

MHP13AT MHP14AT

An extremely versatile unit that will rise to the challenge for the city and the bush.



A heavy duty trailer mounted articulated telescoping boom lift with a working height of up to 13.5m. With a range of options available including automatic stabilisers and alternative power, this unit is extremely versatile.



Key features


- Working height of up to 12.9 metres for the MHP13AT
- Working height of up to 13.5 metres for the MHP14AT
- Heavy duty tow coupling
- Hydraulic stabilisers
- Solid steel platform with two person capacity
- Heavy duty jockey wheel
- Hydraulic disc brakes
- Reliable standard gasoline engine
- Alternative power options
- Stabiliser / boom interlocks
- LED taillights
- Manual basket rotator

Additional options


- Automatic stabilisers
- Custom colours
- Platform work lights
- Air line to platform
- Flashing light
- Height lockout
- Lifting lugs
- Spare wheel
- 240V 110V outlet in platform
- Battery isolate switch
- Platform foot switch
- Alternative power options:
 - Diesel engine
 - 24V power
 - 240V power
- Bi-Energy options:
 - Petrol / 24V
 - Petrol / 240V
 - Diesel / 24V
 - Diesel 240V
 - 24V / 240V



WORKING SPAN

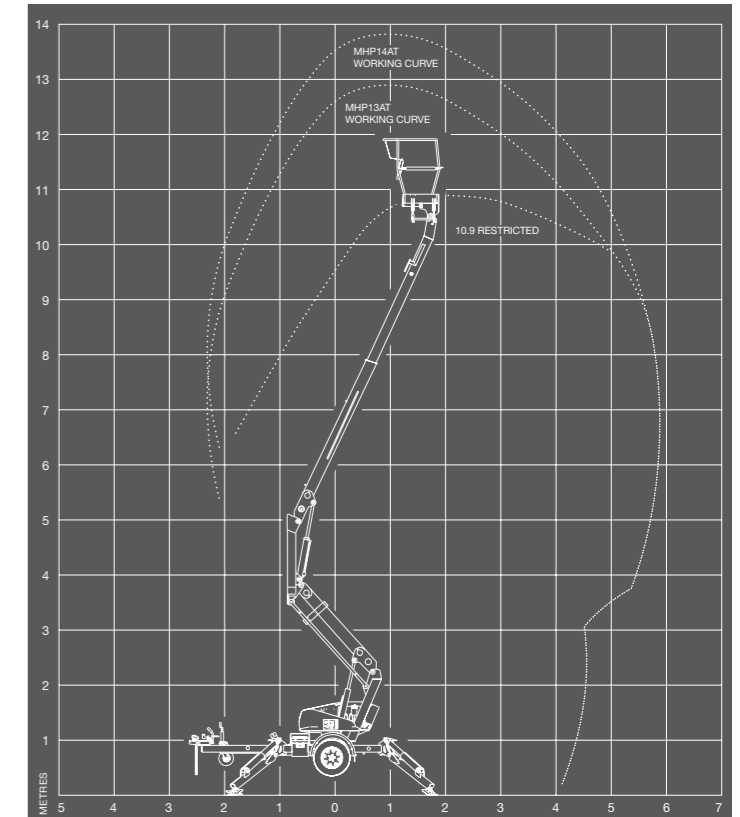

COMPACT DESIGN

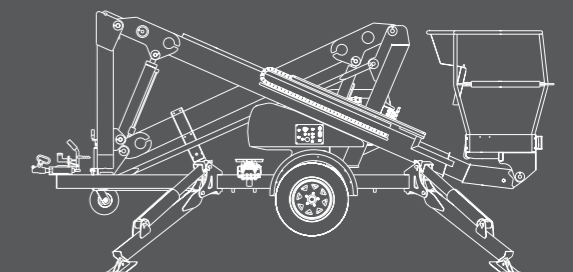

TRAILER MOUNT
MHP13AT • MHP14AT

Contact us

At Snorkel, we've made it easier for you to find the information you need. Speak to us or visit our website www.snorkellift.com for more information.

- Sales
0800 SNORKEL
- Technical support
0800 766 7535
- Parts and service
0800 SNORKEL

Specifications

	MHP13AT	MHP14AT
Working height	12.9m	13.5m
Platform height	10.9m	10.9m
Maximum outreach	6.4m	6.4m
Maximum width of base		
Stabilisers retracted	1.6m	1.6m
Stabilisers extended	3.6m	3.6m
Safe working load – unrestricted	215kg	215kg
Platform size	1.15 x 0.70m	1.15 x 0.70m
Platform construction	Steel	Steel
Platform levelling	Hydraulic (master/slave)	Hydraulic (master/slave)
Boom type	Articulating telescopic	Articulating telescopic
Turntable rotation	540° non-continuous	540° non-continuous
Power source – standard	Petrol engine	Petrol engine
Transport height	2m	2m
Overall length	4.9m	4.9m
Insulation rating	Nil	Nil
Brakes	Hydraulic over-run non free reversing	Hydraulic over-run non free reversing
Tyre size	185R14 102/100P	185R14 102/100P
Maximum wind speed	45km/hr	45km/hr
Weight – petrol model	1460kg	1460kg
Trailer tongue weight	80kg	80kg

DANGER: Standard models described in this brochure are NON-INSULATED and do not provide electrocution protection from contact with or close proximity to energised conductors which is pointed out on the decals and placards attached to the machine. Products in this brochure comply with relevant ANSI and Australian Standards. This literature is for illustrative purposes only. Consult Operating/Maintenance and Parts Manuals for proper procedures. Specifications may vary and are subject to change without notice.



DEALER STICKER



TRAILER MOUNT

MHP13/14AT

