

SAKAI®

GW750 GW750-2

Asphalt Roller



World's First and Only VIBRATORY PNEUMATIC TIRED ROLLER

**A 9 ton vibratory pneumatic tired roller
equal or exceeding the compaction results
of a 25 ton tired roller**

**Versatility with compact size and high
compaction performance**

Improves Compaction Quality and Efficiency

- Dynamic kneading action produces more uniform compaction from top to bottom of the pavement layer
- Versatility on both large and small projects for tight and dense longitudinal joints, hot mix asphalt (HMA), aggregate base, roller compacted concrete and warm- and cold-mixes, etc.
- Maneuverable in tight spaces on city streets, parking lots and cul-de-sacs by center-pin articulated steering
- All wheel drive system to minimize shoving of HMA mix

High Safety Standards

- 1m x 1m visibility
- Emergency brake pedal is standard

Cost Saving

- Savings in trucking and fuel costs with lighter weight and efficient compaction

**SERVICE
HOTLINE**

If you need any technical or service parts support on our products,
please contact this web page.

www.sakainet.co.jp/english/



Proven compaction technology around the world



Major Airports
San Francisco International, CA, USA



Major Airports
Atlanta International, GA, USA



Soil subbase, Australia



Queensland, Australia



Brakedown application, USA




Intermediate application, Japan



The World's First and Only Vibratory pneumatic tire roller With variable amplitude settings

- Four (4) amplitude settings to achieve the required density
- High productivity on both large and small projects with the ability to maneuver in tight spaces on city streets, parking lots and cul-de-sacs.
- Density results achieved by the 9 ton GW750 are equal or higher than those of a 25 ton static tire roller.*¹

*¹ The compaction performance may vary depending on working conditions.

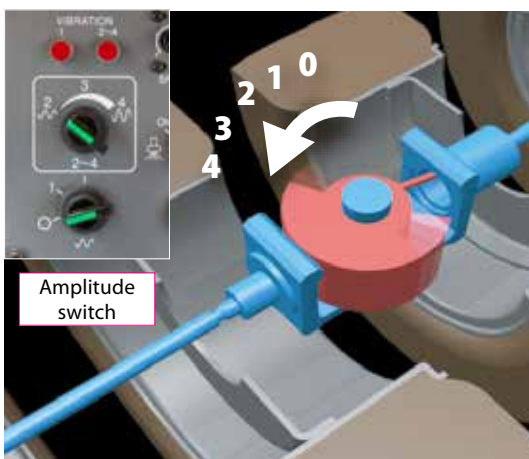

Schematic diagram of variable amplitude vibration

Amplitude setting ^{*2}	Amplitude mm	Centrifugal Force kN	Equivalent compaction efforts to a static pneumatic tire roller ton	Applications and layer thickness (Examples)
Static	0.0	0	= 9	
1	0.1	8	≥ 10	Overlays and thin HMA layers, less than 5cm
2	0.3	25	≥ 15	
3	0.5	42	≥ 20	Binder and base course layers, thicker than 5cm
4	0.7	58	≥ 25	

*² The amplitude selected and number of roller passes should be reconfirmed by test section.

DYNAMIC KNEADING ACTION improves pavement quality

Dynamic Kneading Action compacts pavement materials more uniformly by combining the kneading action of pneumatic tires with the vibration effect.

- Creates better bonding between new overlay pavement and the old milled surface by eliminating the **bridging effect** that normally occurs with steel drum rollers, see Fig.1
- Provide sufficient bonding between aggregates and asphalt emulsion in chip seal pavement, see Fig.2
- Produces tight longitudinal joints , see Fig.3
- Removes hairline cracks from HMA pavement, See Fig. 4
- Gives uniform compaction throughout thick HMA pavement layer, see Fig. 5
- Seals the surface of Roller Compacted Concrete Pavement (RCCP), see Fig.6

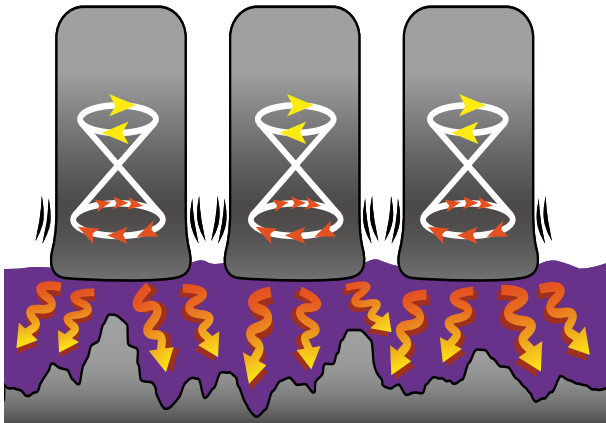


Fig 1. Schematic diagram showing bonding effect between the new overlay pavement and the old milled surface



Fig 4. Remove hairline cracks from HMA pavement



Fig 2. Chip seal pavement finished by GW750

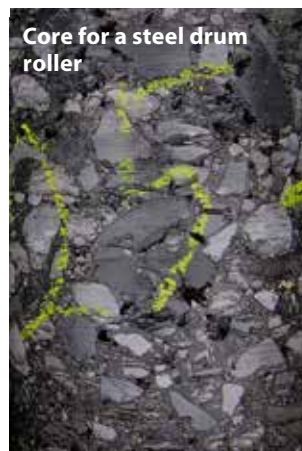


Fig 5. Uniform compaction throughout thick lift (27 cm with 3.8cm aggregate size) HMA pavement layer by two different rollers


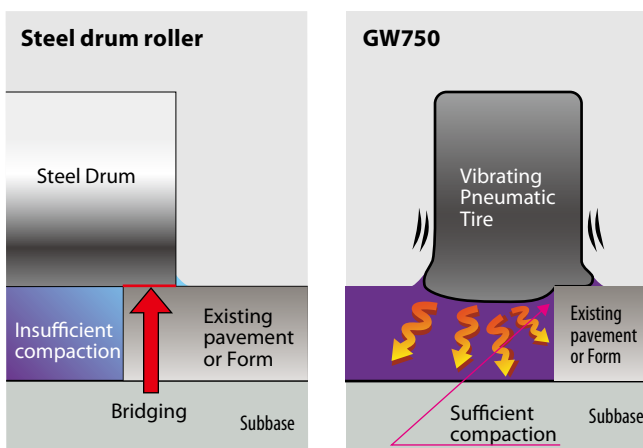


Fig 3. Tighter longitudinal joint along existing pavement or forms with a steel drum roller vs. the GW750



Fig 6. Sealing the surface of Roller Compacted Concrete Pavement (RCCP)

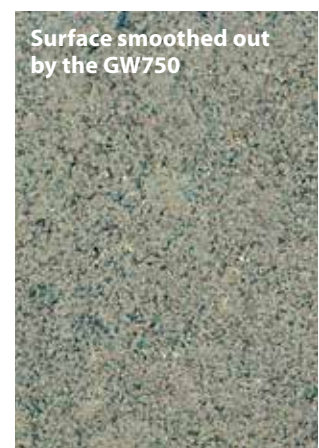

Further improvements on compaction quality

- Center-pin articulated steering system gives perfect tire overlap and finishes HMA pavement smoothly without shoving the HMA mix
- Overlap between tires in front and rear axles ranges up to 145 mm
- **All Wheel Drive** minimizes the shoving of both **tender** and **stiff** HMA mixes regardless of which direction the machine is rolling.
- **Super-flat** tires achieve a smoother finish on HMA pavement surfaces compared to conventional rounded pneumatic tires.





Saving in trucking and fuel costs

- Easier and faster to move to and from jobs due to lighter weight only 9 tons
- Lower weight means lower fuel consumption when hauling and when operating the roller




Three amigos in one trailer

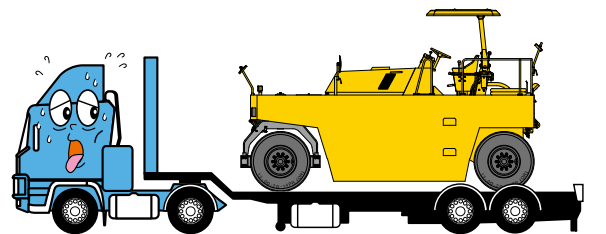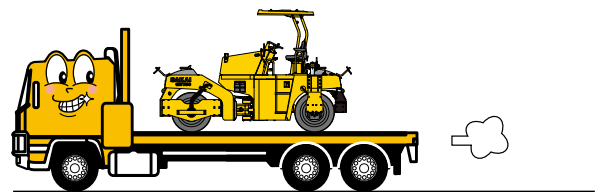

Environment friendly

- Approximately 40 % reduction of the CO₂ gas^{*3} by using the GW750 compared with a 25 ton static tire roller


^{*3} The amount of CO₂ gas was estimated based on working hours required for compacting 2000 m² area under fuel consumption by the engines mounted on each model.

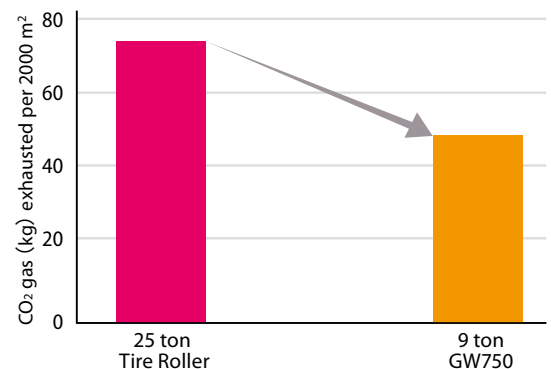

High safety standard


● 1 m x 1 m visibility

- The operator is able to have excellent all around visibility from the operator seat Blind spot is very small.

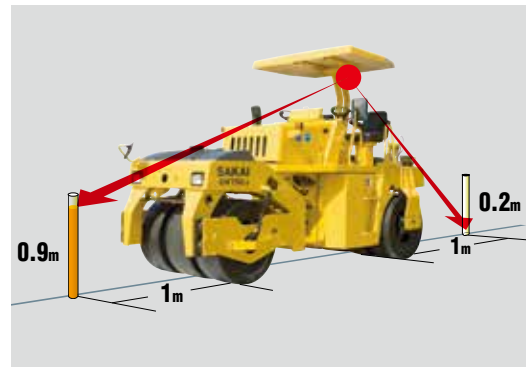

● Tire edge visibility with two seats side by side


- Good visibility along curbs and in tight spaces

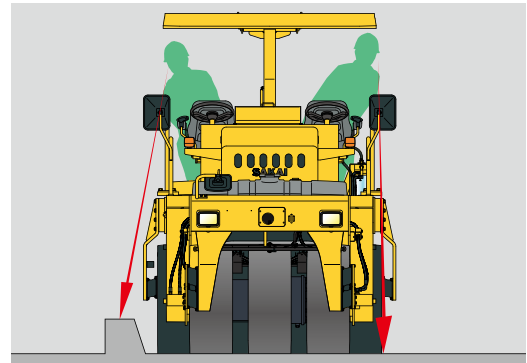

● Brake system


- Emergency pedal brake
- Hydrostatic primary brake
- SAHR*⁴ secondary brake for parking and emergency auto brake

*⁴ SAHR: Spring-Applied, Hydraulically Released brake

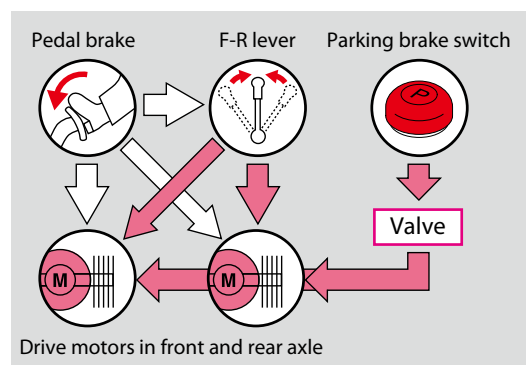

● Interlock of engine start with a Forward-Reverse (F-R) lever

- Engine can be cranked only when F-R lever is placed in the neutral position
- Vibration switch mounted on the grip of F-R lever

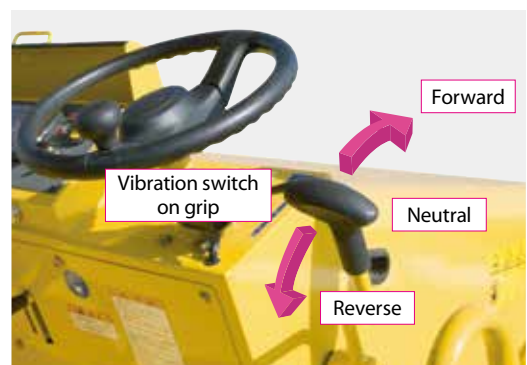

● ROPS CANOPY (Optional)



Environment friendly


● Rustproof sprinkler and release agent spray systems

● Water sprinkler system

- Plastic water tank (300 L x 2)
- Visible water gauge from operator seat
- Inline filter with a handle for cleaning filter element
- Stainless spray bars
- Brass quick - mount nozzles with filter
- Perfect winterization


● Release agent spray system

- Plastic tank (Approx.20 L)
- Suction filter in the plastic tank
- Brass spray bars
- Brass quick - mount nozzles with filter
- Spray adjusting valves
- Perfect winterization

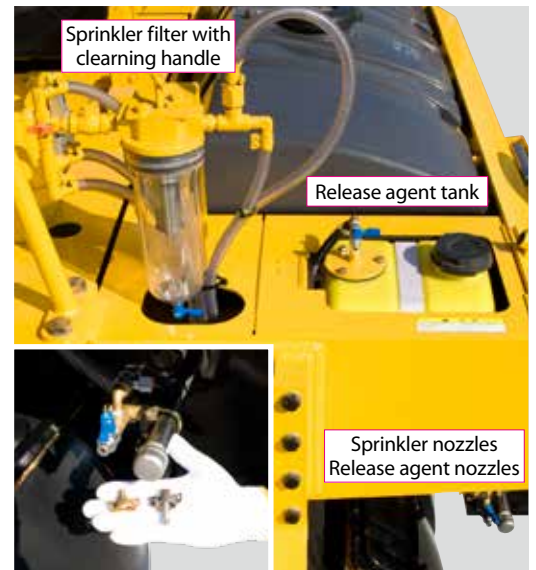


● Easy access to maintenance points

- Fully opened engine hood
- Wide doors accessible from the ground

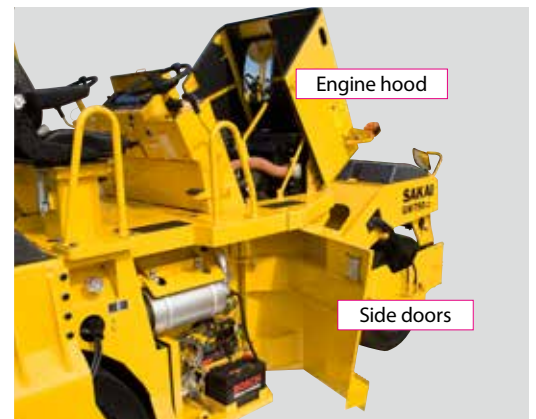

● Engine diagnostic indicators (Only GW750-2)

- **Engine check**
 - For electric control of engine
- **Boost Temp.**
 - For turbo and fuel temperature
- **Overheat**
 - For coolant temperature



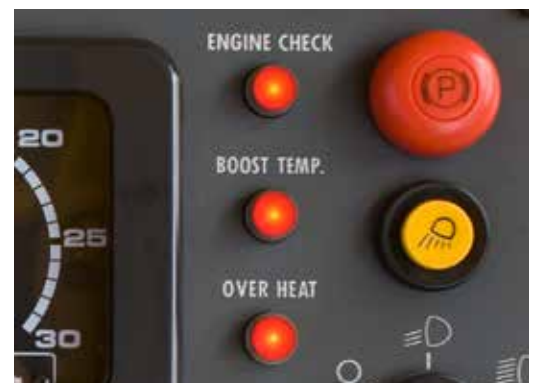


● Quick change Coco-mat (Optional)

- Flexible rubber mounted Coco-mat for quick change
- Coco mats fit tight to the tires



GW750 GW750-2

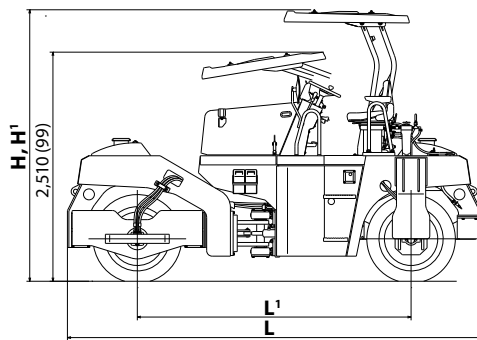

mm (in)

TYPE		Vibratory Pneumatic Tired Roller		
MODEL		GW750	GW750-2	
CHASSIS MODEL		VGW1	1GW2	
WEIGHTS	Max. operating weight with AWNING	kg (lbs)	9,040 (19,930)	
	Max. operating weight with ROPS CANOPY	kg (lbs)	9,280 (20,460)	
	Operating weight with AWNING	kg (lbs)	8,700 (19,185)	
	Shipping weight with AWNING	kg (lbs)	8,300 (18,300)	
	Load on front axle - operating weight with AWNING	kg (lbs)	3,710 (8,180)	
	Load on rear axle - operating weight with AWNING	kg (lbs)	4,990 (11,005)	
PERFORMANCE	Centrifugal force (Front 1/2/3/4)	kN (lbs)	6 / 19 / 32 / 45 (1,345 / 4,270 / 7,190 / 10,115)	
	Centrifugal force (Rear 1/2/3/4)	kN (lbs)	8 / 25 / 42 / 58 (1,750 / 5,505 / 9,415 / 13,125)	
	Frequency	Hz (vpm)	40 (2,400)	
	Amplitude (1/2/3/4)	mm (in)	0.10 / 0.31 / 0.53 / 0.74 (0.004 / 0.012 / 0.021 / 0.029)	
	Number of speed shifts		3	
	Speed range (1/2/3)	km / h (mph)	5 / 7 / 12 (2.8 / 4.3 / 7.5)	
	Gradeability	% (°)	38 (20)	
DIMENSIONS	Turning radius compacted surface (inside / outside)	m (in)	3.8 / 5.4 (150 / 213)	
	Overall length L	mm (in)	4,540 (179)	
	Overall width W	mm (in)	2,200 (87)	
	Overall height at the top of steering wheel	mm (in)	2,185 (86)	
	Overall height (with AWNING) H	mm (in)	2,975 (117)	
	Overall height (with ROPS) H'	mm (in)	3,035 (119)	
	Wheelbase L'	mm (in)	3,000 (118)	
	Compaction width W'	mm (in)	1,950 (77)	
	Tire size x Number of tires (Front / Rear)		14 / 70 - 20 - 12 PR (3/4)	
	Inflation (each wheels)	kPa (psi)	441 (63.9)	
	Ground clearance	mm (in)	265 (10)	
	Curb clearance	mm (in)	245 (10)	
	Side clearance	mm (in)	125 (5)	
ENGINE	Make & Model	ISUZU "DD-4BG1T" Tier2 : equivalent ISUZU "4JJ1XDIA" Tier3 : equivalent		
	Type	Diesel, water-cooled, 4-cycle, 4-cylinder inline, with turbo charger		
	Displacement	L (cu.in)	4.329 (264.2) 2.999 (183.0)	
	Rated output	kW (HP)/min ⁻¹	78.8 (106) / 2,300 92.0 (123) / 2,200	
	Electric system battery	V (V / Ah x Qty)	24 (12 / 80Ah x 2)	
	Electric system alternator	V/A	24 / 50	
DRIVE SYSTEM	Power transmission type	Hydrostatic		
	Drive wheel	All wheel		
VIBRATION SYSTEM	Power transmission type	Hydraulic		
	Number of amplitude	4		
	Vibrator type	Variable eccentric shaft		
BRAKE SYSTEM	Service brake	Dynamic braking through hydrostatic drive system / FNR lever		
	Secondary brake (Emergency brake)	Hydrostatic + Spring applied hydraulically released type (SAHR) / Brake pedal		
	Parking brake	SAHR / Panel button		
STEERING SYSTEM	Power transmission type	Hydraulic		
	Articulation / Oscillation angle	± (°)	37 / 6	
FLUID CAPACITY	Fuel tank	L (gal)	130 (34.3)	
	Hydraulic oil tank	L (gal)	65 (17.2)	
	Water Sprinkler tank	L (gal)	280 (73.97) x 2	

- Max. operating weight : 100 % fuel, 100 % water, operator 75 kg
- Operating weight : 50 % fuel, 50 % water, operator 75 kg
- Specifications are subject change without notice.
- All units are SI units. Inside of () is for reference units.
- Above specified numbers could be deviated within ±5 %.

* Using low quality fuel may cause engine failure.

Standard Equipment :

- AWNING ● Instrument panel ● Gauges ● Backup alarm ● Horn
- Working lights ● Pressurized water sprinkler system
- Intermittent water spray timer ● Release agent spray system

Optional Equipment :

- ROPS CANOPY ● Cocomat ● 4 points lifting hook



SAKAI HEAVY INDUSTRIES, LTD. obtain the certification of quality management system ISO9001.

HEAD OFFICE: 1-4-8, SHIBA DAIMON, MINATO-KU, TOKYO JAPAN
 TELEPHONE: +81-3-3431-9971
 FACSIMILE: +81-3-3436-6212