


SPECIFICATIONS - 6 Series

	G-624			G-627			DL 620		
PERFORMANCE									
Max. lift capacity				250 kg			551 lbs		
Travel speed				7 km/h			4.3 mph		
Operating weight (incl. bucket)	813 kg			1792 lbs					
Fuel capacity				42 l			11.1 gUS		
ENGINES									
Make	Honda GX670			Kohler Command Pro			Kubota D722		
Power	17.7 kW			24 hp			20 hp		
DRIVE SYSTEM									
Drive Control Soft Touch									
Throttle Control									
Wheels									
HYDRAULICS									
Gear pump displacement				11.3 cc/rev			0.690 cu.in/rev		
Pump output				40 l/min			10.6 gUS/min		
System pressure				203 bar			2950 psi		
Hyd. reservoir capacity				55 l			14.5 gUS/min		
BUCKETS									
Standard bucket capacity				0.1 m3			3.5 cu.ft		
4 in 1 bucket capacity				0.1 m3			3.5 cu.ft		

DIMENSIONS - 6 Series

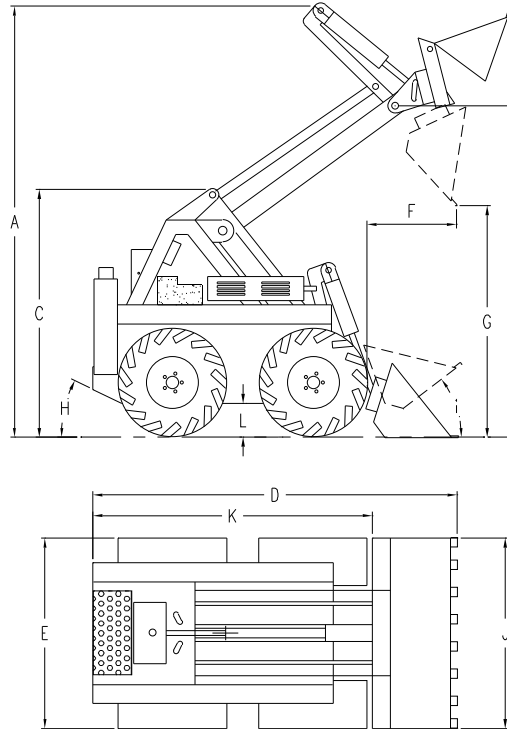

	DIMENSIONS	mm	inch
A	Max. operating height	2385	94
B	Height to hinge pin	1780	70
C	Overall height	1310	52
D	Overall length	2070	81
E	Overall wheel width	1015	40
B	Dump height 4 in 1 bucket	1780	70
F	Bucket max. reach at 45°	560	22
G	Dump height std bucket 45°	1125	44
H	Angle of departure	37°	
I	Max. roll back	47°	
J	Bucket width	1050	41
K	Overall length less bucket	1620	64
L	Ground clearance	170	6.75